

TOTALIZER MONITOR

WITH HIGH / LOW TOTALIZER ALARM AND
ANALOG SIGNAL OUTPUT



Advantages

- Robust IP67 (NEMA4X) field enclosure. It is so rugged, you can even stand on it!
- Intrinsically Safe available - ATEX and IECEx approval for gas and dust applications.
- Programming can be done by your own crew, with the sensible menu-driven structure, saving cost and irritation. **Know one, know them all!**
- Very diverse mounting possibilities: walls, pipes, panels or directly onto outdoor sensors!

Features

- The desired totalized (preset) quantity can be set by the operator
- Reset totalizer: after stop or time based.
- Totalizer monitoring: two alarm values can be set: low and high totalizer alarm.
- Displays total and preset value or percentage simultaneously.
- Displays clear alarm messages.
- Quadrature input to detect the flow direction.
- Explosion/flame proof $\text{Ex II 2 GD EEx d IIB T5}$.
- Full Modbus communication RS232/485/TTL.
- Loop or battery powered, 8 - 24V AC/DC or 115 - 230V AC power supply.

Signal output

- One high and one low totalizer alarm output.
- (0)4 - 20mA / 0 - 10V DC related to the totalized quantity or the flow rate.

Signal input

Flow

- Ability to process all types of flow meter signals: Reed-switch, NAMUR, NPN/PNP pulse, Sine wave (coil), Active pulse signals.

Applications

- The F-Series is your first and safest choice for field mount indicators. Especially in harsh weather conditions like rain, snow, salty atmospheres and temperatures between -40°C up to +80°C (-40°F up to 176°F) for safe and hazardous area applications!
- Automated (production) processes where a minimum and / or a maximum dispensed quantity has to be monitored continuously. For DIN panel mount indicators, check our [D-Series](#).

General information

Introduction

The F117 has been developed for applications where the totalized quantity has to be monitored and not the flow rate. When a start-command is given, the totalizer is reset to zero. The amount of product measured from that moment is monitored continuously for high totalizer values. Monitoring for low alarm values will commence after a stop-command is given or after a pre-defined process time. The alarm values itself are entered as a percentage of the preset value and are immediately converted to a displayed quantity, also after change of the preset value. A totalizer alarm will be displayed clearly while an external device can be controlled with the alarm outputs.

Display

The display has large 17mm (0.67") and 8mm (0.31") digits which shows the actual totalized quantity, preset value, percentage and alarm values. The alarm values can be password protected. On-screen engineering units are easily configured from a comprehensive menu.
The accumulated total and flow rate can be displayed after a monitoring process only.

Configuration

All configuration settings are accessed via a simple operator menu which can be password protected. Each setting is clearly indicated with an alpha-numerical description, which avoids confusing abbreviations and baffling codes.
Once familiar with one F-series product, you will be able to program all models in the series without a manual. All settings are safely stored in EEPROM memory in the event of sudden power failure.

Analog output signal

The (0)4 - 20mA or 0 - 10V DC analog output value mirrors the flow rate or the measured quantity in relation to the preset value. The output signal is updated eight times per second. The output value will be e.g. 4mA after the start-command and being 20mA at reaching the preset value.

The output signal can be passive, active or isolated where the passive -output type will loop power the F117 as well.

Alarm output

Two alarm outputs are available to transmit the high or low totalizer alarm condition. The output signals can be a passive NPN, active PNP or an isolated electro-mechanical relay.

Signal input

The F117 accepts most pulse input signals for volumetric flow or mass flow measurement. The input signal type can be selected by the user in the configuration menu. Additional inputs are available for remote control, bi-directional measurement or higher input resolution (sum function).

Communication

All process data and settings can be read and modified manually or through the Modbus communication link (RS232 / RS485). Full Modbus functionality remains available for the Intrinsically Safe version (TTL).


Hazardous areas

This model has been ATEX and IECEx certified Intrinsically Safe for gas and dust applications, with an allowed ambient temperature of -40°C to +70°C (-40°F to +158°F). A flame proof enclosure with ATEX certification offers the rating Ex II 2 GD EEx d IIB T5.

Enclosures


Various types of enclosures can be selected, all ATEX and IECEx approved. As standard the F117 is supplied in an GRP panel mount enclosure, which can be converted to an GRP field mount enclosure. Most popular is our rugged aluminum field mount enclosure with IP67 / NEMA 4X rating. Both European or U.S. cable gland entry threads are available.

Overview application F117

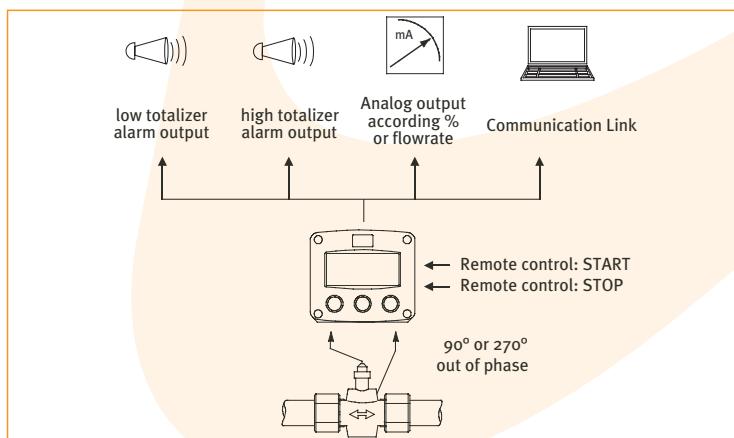


Dimensions enclosures

Aluminum & GRP panel mount enclosure

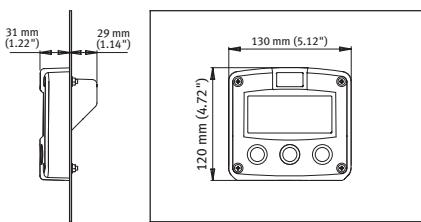


HB & HC enclosures




panel cut-out


Aluminum & GRP field / wall mount enclosures



Aluminum











HA




GRP

HD



HV


HE



HF



HG



HH




HJ



HK

Flat bottom, no holes available.

Terminal connections



POWER REQUIREMENTS	LOW ALARM OUTPUT1		LOW ALARM OUTPUT2		ANALOG OUTPUT1		ANALOG OUTPUT2		FLOW METER INPUT A		FLOW METER INPUT B or ADDITIONAL INPUT		ADDITIONAL INPUT				
	GND	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
PD 8-24V/AC	-	+	~	+	~	+	~	+	~	+	~	+	~	+	~	+	+
PD 8-24V/DC	+	~	~	+	~	+	~	+	~	+	~	+	~	+	~	+	+
PD 8-16-30V/DC	-	+	~	+	~	+	~	+	~	+	~	+	~	+	~	+	+
P.D. 24V/AC	+	~	~	+	~	+	~	+	~	+	~	+	~	+	~	+	+
P.F. 24V/DC	-	+	~	+	~	+	~	+	~	+	~	+	~	+	~	+	+
P.M. 115-230V/AC	+	~	~	+	~	+	~	+	~	+	~	+	~	+	~	+	+
P.X/ZB: Backlight supply	-	+	~	+	~	+	~	+	~	+	~	+	~	+	~	+	+

Note: configuration setting for
bidirectional sum measurement
or control points.

(With PD / P.F / P.M terminals 1/2 are not available,
backlight power supply is integrated.)


PX: 8-30V/DC Powered unit with type A/P
Output 100mA Current output (Terminals GND 1-2 are not available)

PB: PC battery powered
Internal LiPo battery
(Terminals GND 1-2 are not available)


Display example - 90 x 40mm (3.5" x 1.6")



Typical wiring diagram F117-P-(AP)-CH-(OT)-PB

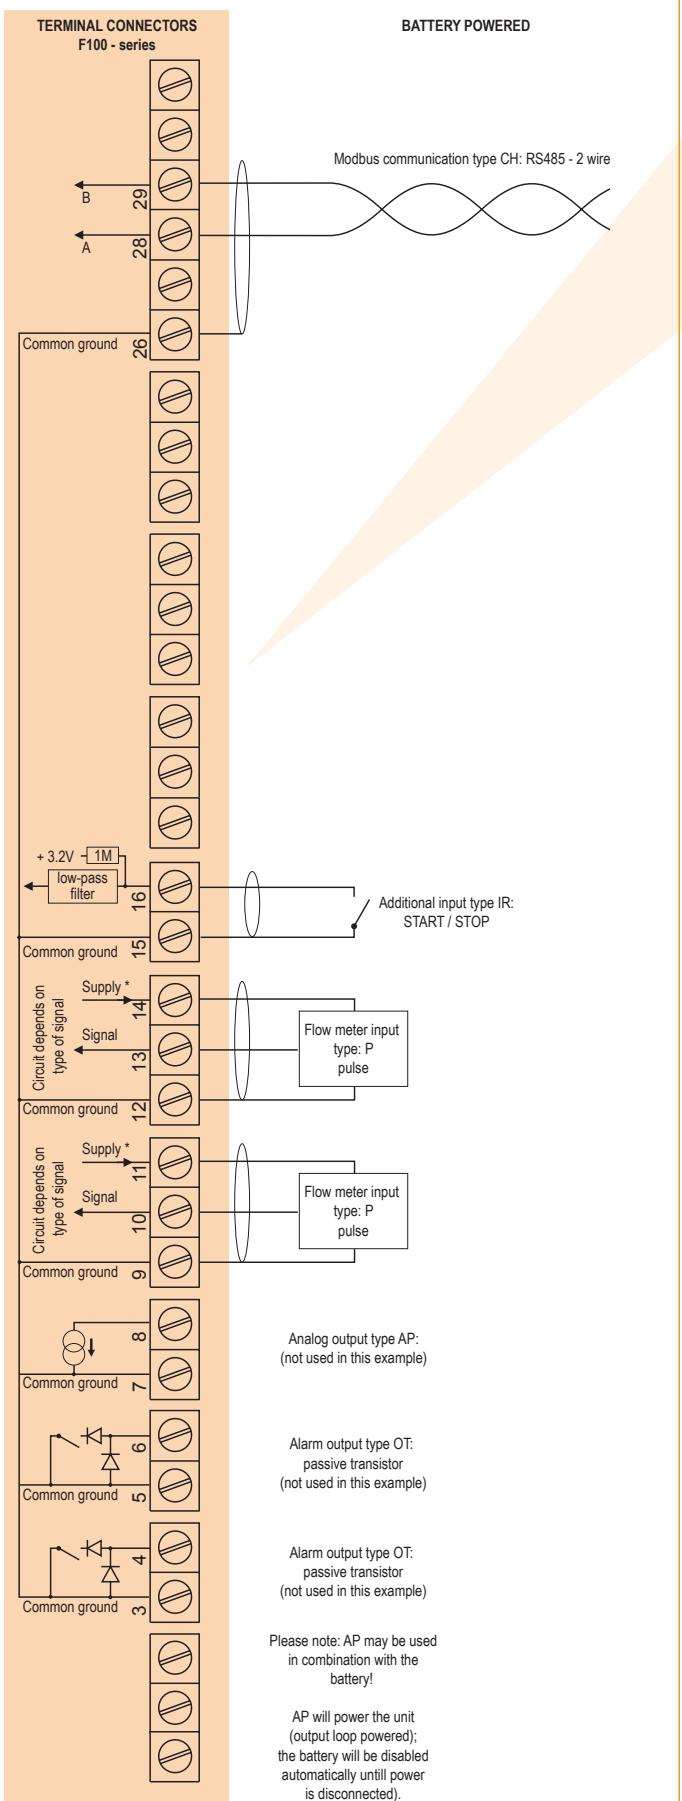


Typical wiring diagram F117-P-AP-CH-OT-PX

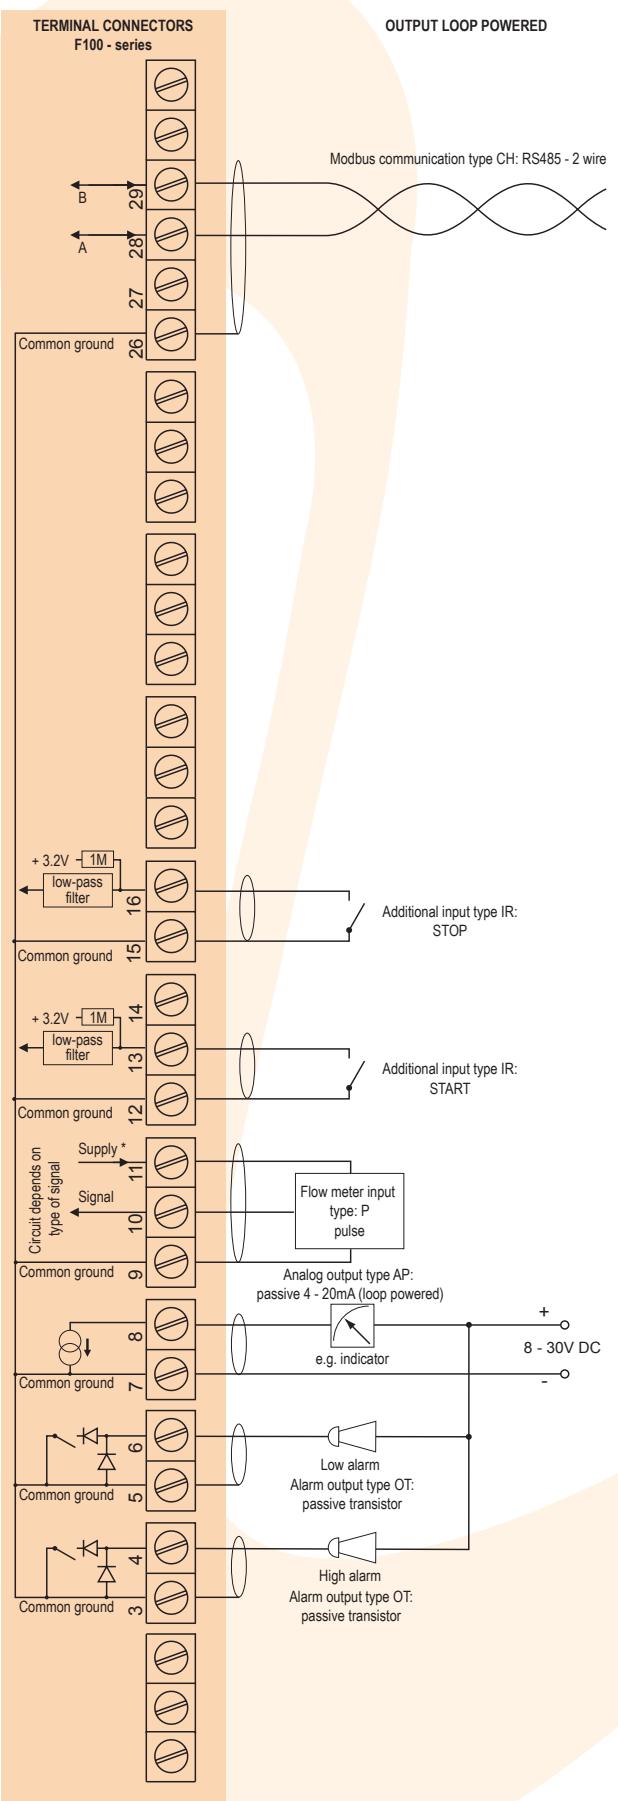


Typical wiring diagram F117-P-AA-CB-OA-PD

Typical wiring diagram F117-P-AI-CI-OR-PM

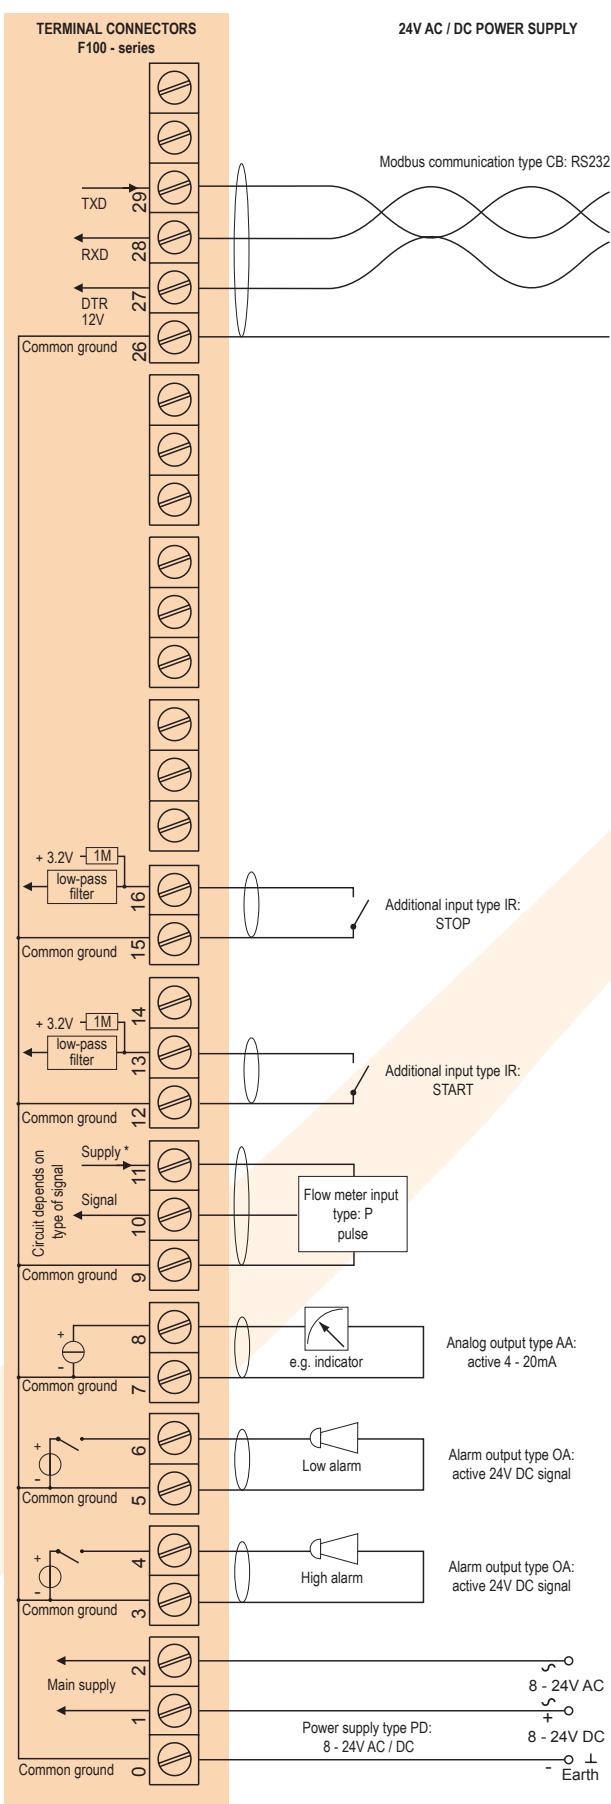

*Supply voltage: 1.2 / 3.2 / 8.2 / 12 / 24V DC to sensor

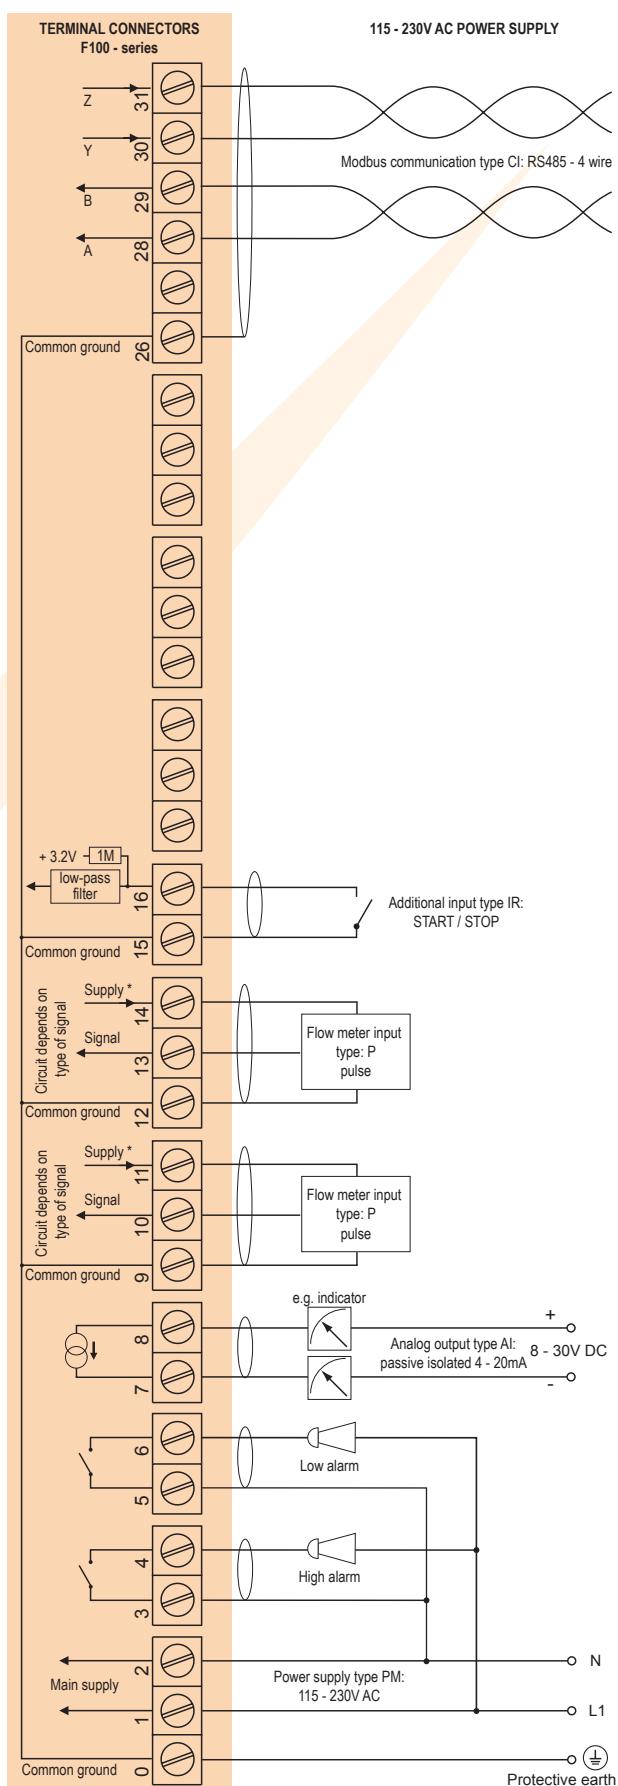

*Supply voltage: 1.2 / 3.2 / 8.2 / 12 / 24V DC to sensor

Hazardous area applications

The F117-XI has been certified according ATEX and IECEx by DEKRA for use in Intrinsically Safe applications with an ambient temperature of -40°C to +70°C (-40°F to +158°F).

- The ATEX markings for gas and dust applications are:



II 1 G Ex ia IIB/IIC T4 Ga
II 1 D Ex ia IIIC T100 °C Da IP6X.

- The IECEx markings for gas and dust applications are: **Ex ia IIC/IIB T4 Ga** and **Ex ia IIIC T100 °C Da IP6X.**

Besides the I.S. power supplies for the two alarm outputs, it is allowed to connect up to four I.S. power supplies in IIB/IIIC applications or one in IIC applications. Consult the certificate for the maximum input and output values of the circuits. Full functionality of the F117 remains available, including two alarm and 4 - 20mA output and Modbus communication (type CT). Power supply type PD-XI offers a 8.2V sensor supply e.g. for one Namur sensor. A flame proof enclosure with rating ATEX **Ex II 2 GD EEx d IIB T5** is available as well. Please contact your supplier for further details.


Certificate of conformity KEMA o3ATEX1074 X

- IECEx DEK 11.0042X


IECEx Certificate of Conformity		
INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification Scheme for Explosive Atmospheres For more details of the IECEx Scheme see www.iecex.com		
Certificate No.: IECEx DEK 11.0042X	Issue No. 0	Certificate history:
Status: Current		
Date of Issue: 2011-04-22	Page 1 of 4	
Applicant: Fluidwell B.V. Volweg 23 6812 AZ Arnhem The Netherlands		
Electrical Apparatus: Optional accessory: Indicator Model F1 Series		
Type of Protection: Ex i		
Marking: Ex ia IICB T4 Ga Ex ia IIIC T100 °C Da IP6X		
Approved for issue on behalf of the IECEx Certification Body: C.G. van Es		
Position: Certification Manager		
Signature: (for printed version)		
Date: 2011-04-22		
<p>This certificate and schedule may only be reproduced in full. 2. This certificate is not transferable and remains the property of the issuing body. 3. The status and authenticity of this certificate may be verified by visiting the website of the certification body.</p> <p>CERTIFICATE EC-Type Examination</p> <p>(1) This equipment and protective systems intended for use in potentially explosive atmospheres - Directive 94/9/EC (2) Equipment and protective systems intended for use in potentially explosive atmospheres - Directive 94/9/EC (3) Equipment Examination Certificate Number: KEMA 03ATEX1074 X (4) Equipment: Indicator Model F1 Series (5) Manufacturer: Fluidwell B.V. (6) Address: Volweg 23, 5468 AZ Veghel, The Netherlands (7) This equipment and any acceptable variation thereof is specified in the schedule to this certificate and the documents therein referred to. (8) DEKRA Certification B.V., notified body number 0344 in accordance with Article 9 of the Council Directive 94/9/EC of 23 March 1994 on equipment and protective systems intended for use in potentially explosive atmospheres (hereinafter referred to as "the Directive"). The examination and test results are recorded in confidential test report number NILEXEN/EX11/0030** The examination and test results have been issued by compliance with: EN 60079-0 : 2009 EN 60079-11 : 2007 EN 60079-28 : 2007 EN 60524-11 : 2006 (10) If the sign "x" is placed after the certificate number, it indicates that the equipment is subject to special conditions, for safe use indicated in the schedule to this certificate. (11) This certificate is valid for the equipment only as far as the design, manufacture and trade of the specific equipment according to the Directive 94/9/EC. Further use of the equipment outside the scope of this certificate is not covered by this certificate. (12) The marking of the equipment shall include the following: II 1 G Ex ia IICB T4 Ga II 1 D Ex ia IIIC T100 °C Da IP6X</p> <p>This certificate is issued on 22 April 2011 and, as far as applicable, shall remain valid before the date of revision of the examination of conformity of this equipment in accordance with the Official Journal of the European Union.</p> <p>DEKRA Certification B.V. C.G. van Es Certification Manager</p> <p>All testing, inspection, auditing and certification activities of the former KEMA Quality are an integral part of the DEKRA Certification Group.</p> <p><small>* Import and export of this certificate and its bearing rights is allowed. This Certificate may only be introduced to another and without any change.</small></p> <p><small>** All testing, inspection, auditing and certification activities of the former KEMA Quality are an integral part of the DEKRA Certification Group.</small></p> <p><small>DEKRA Certification B.V. - Utrechtseweg 210, 6812 AR Arnhem P.O. Box 5465, 6800 ED Arnhem, The Netherlands T: +31 20 2 95 20 00 F: +31 20 2 95 20 10 www.dekra-certification.com Registered Arnhem 0005386</small></p>		

Configuration example IIB / IIIC and IIC

F117-P-(AP)-(CT)-(OT)-PC-XI - Battery powered unit

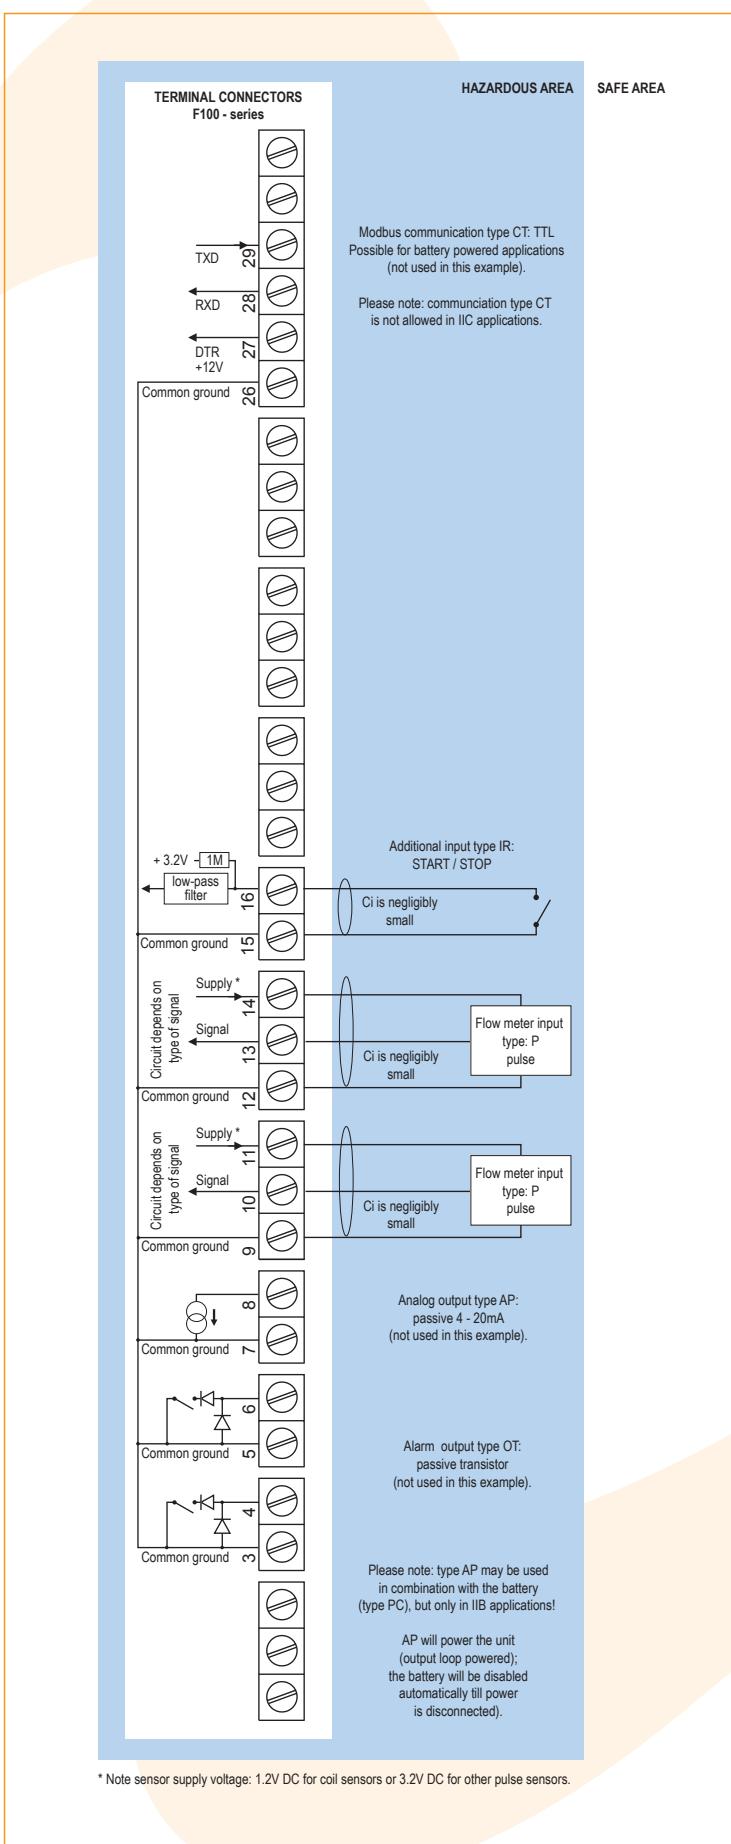


Configuration example IIB / IIIC and IIC - F117-P-AP-(CT)-OT-PX-XI - Output loop powered

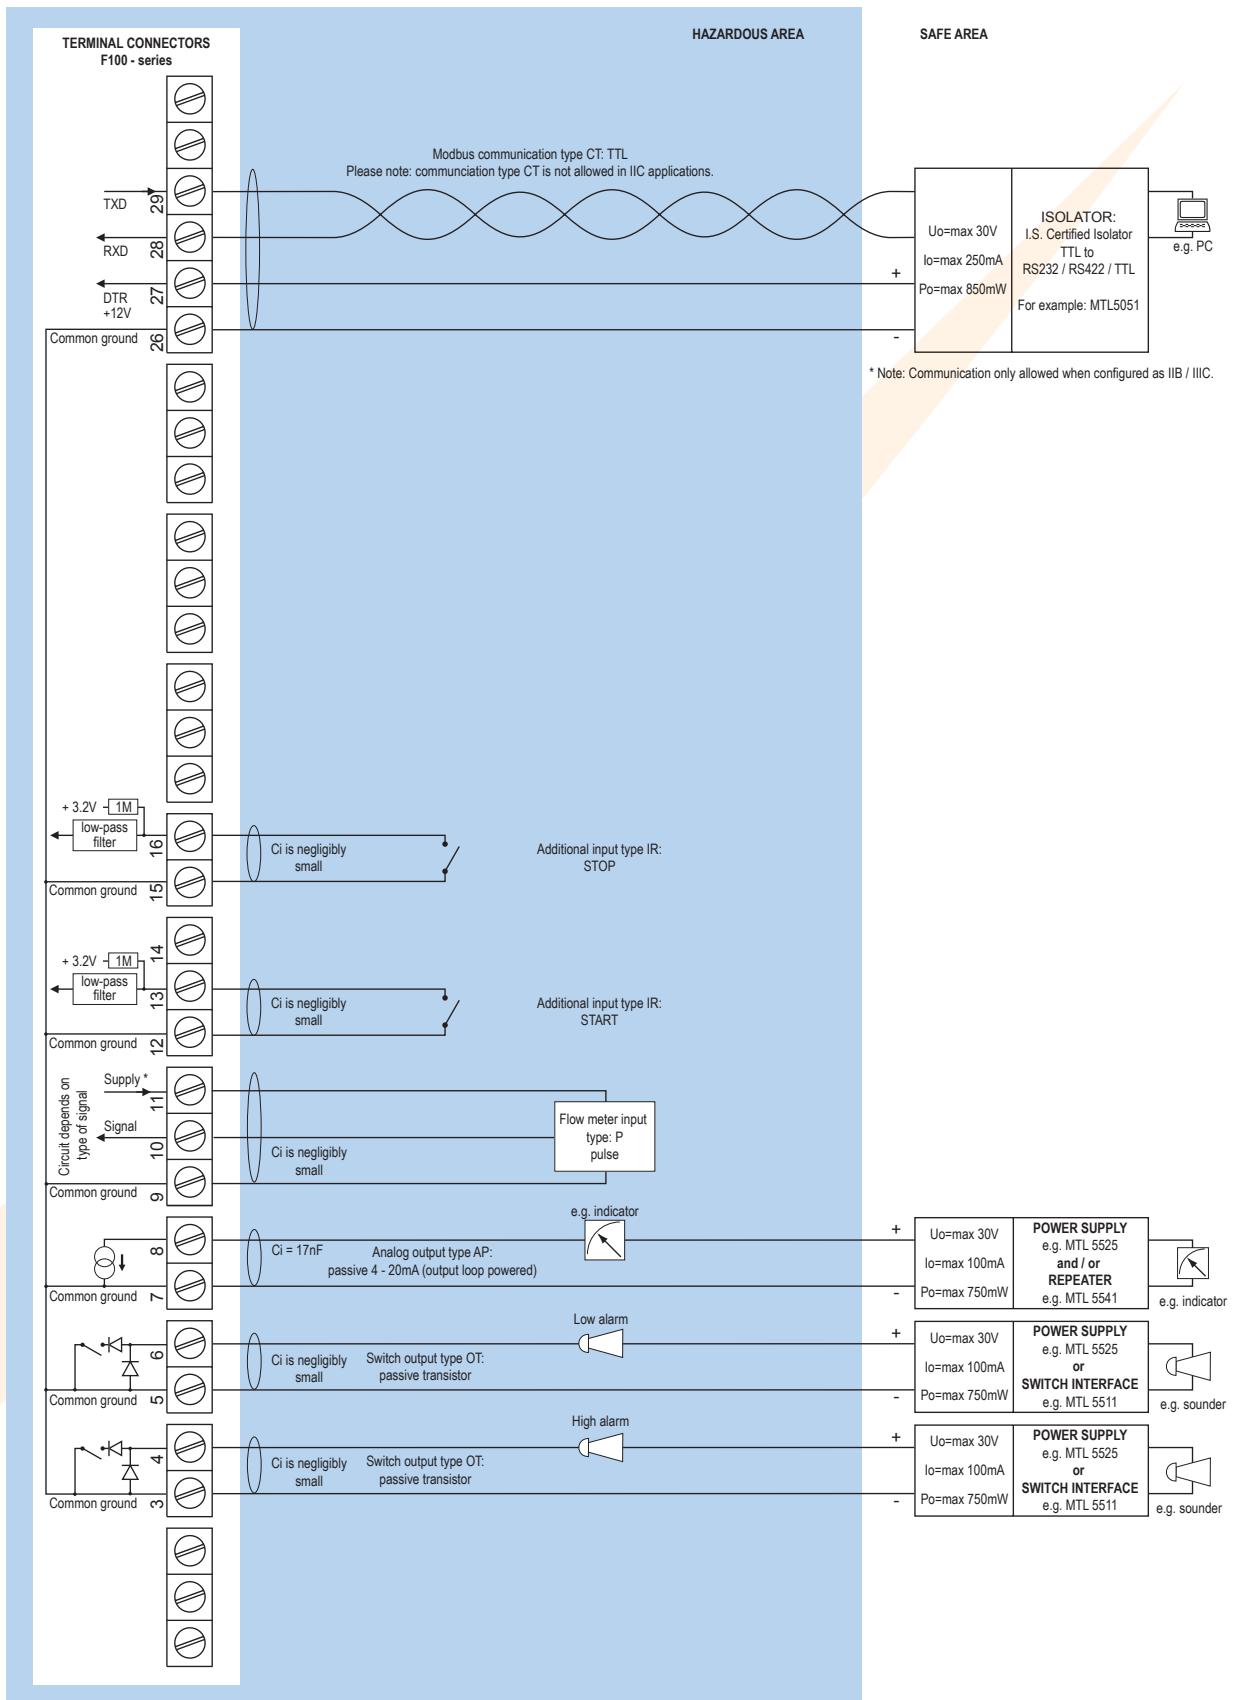

* Note sensor supply voltage: 1.2V DC for coil sensors or 3.2V DC for other pulse sensors.


Configuration example IIB / IIIC and IIC - F117-P-AF-(CT)-OT-PD-XI - Power requirement 16 - 30V DC

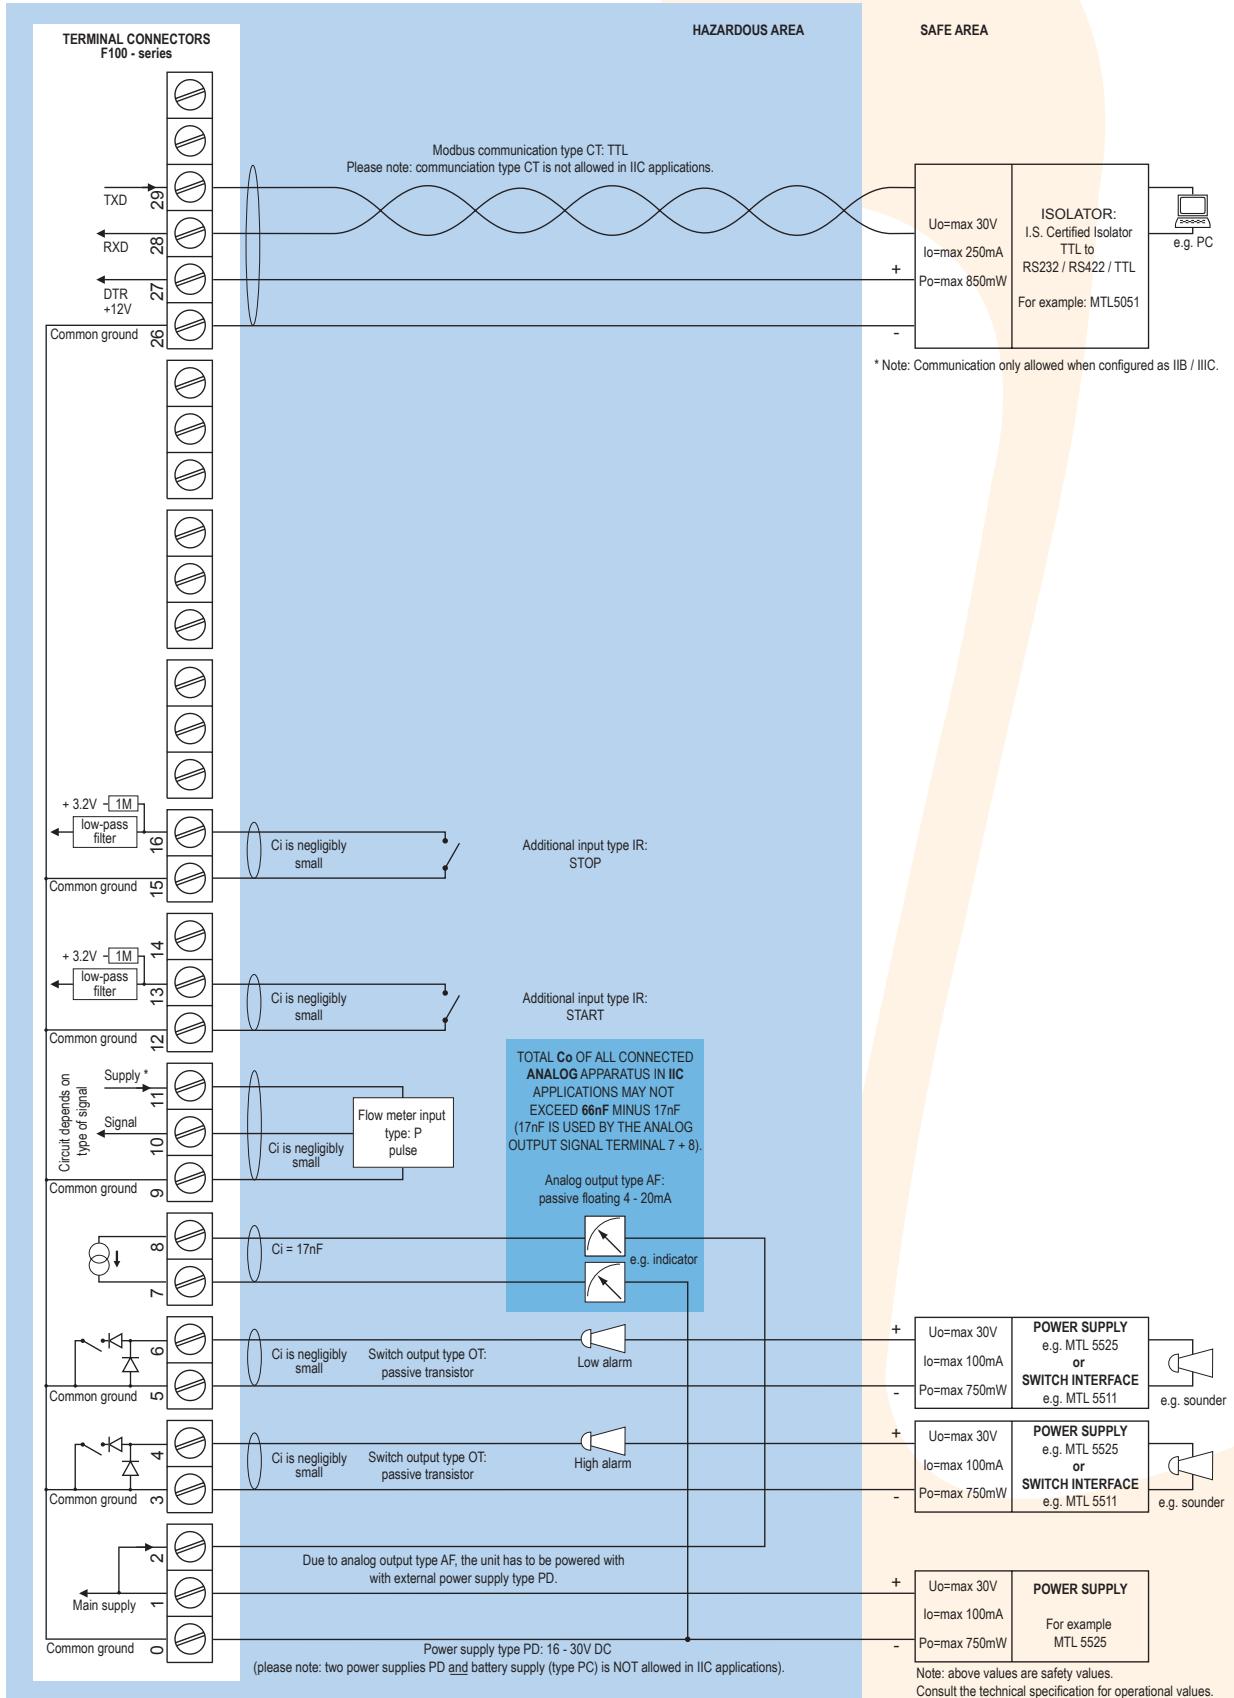

* Note power supply type PD: the supply voltage to pulse sensors is maximum 8.7V (Uo=max 8.7V Io=max 25mA Po=max 150mW).

Note: above values are safety values.
Consult the technical specification for operational values.

Configuration example IIB / IIIC - F117-P-AP-CT-OT-(PD)-XI - Power requirement 16 - 30V DC

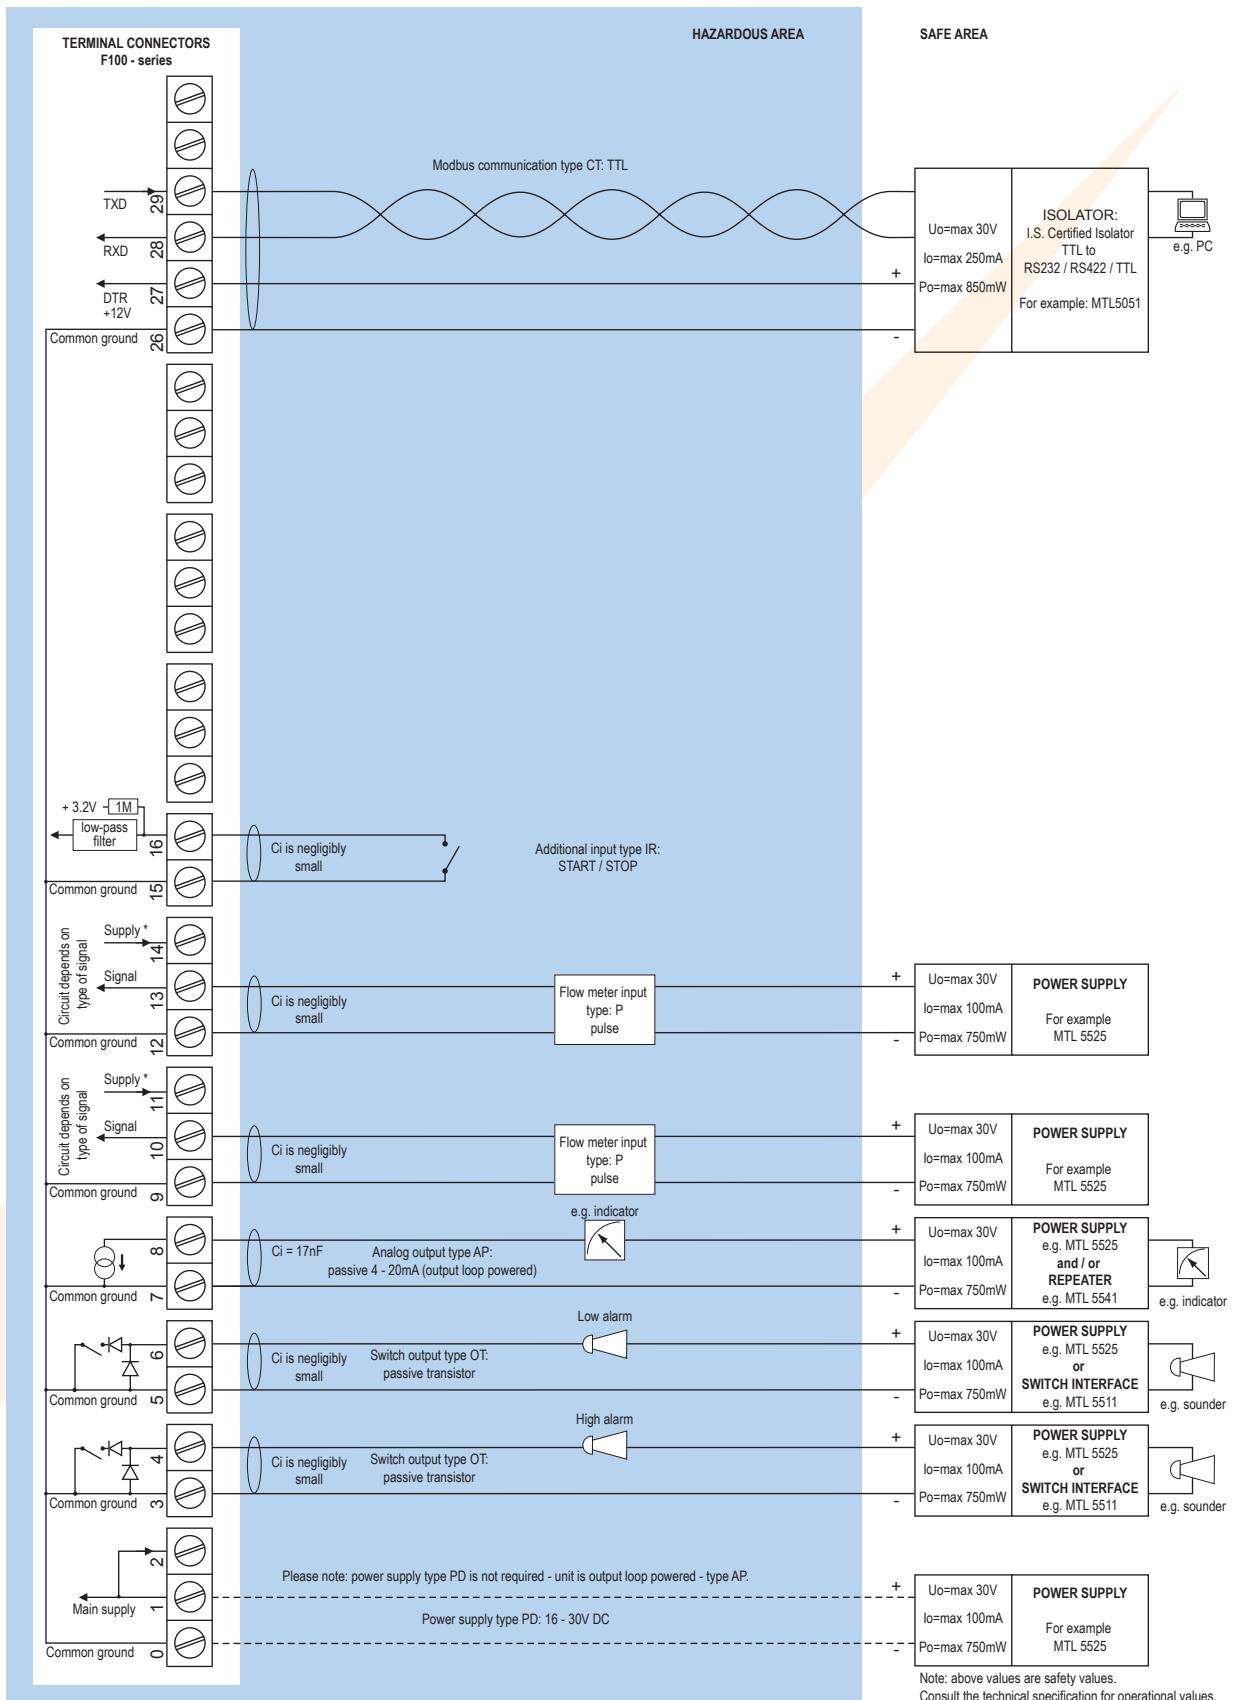

* Note power supply type PD: the supply voltage to pulse sensors is maximum 8.7V ($U_o=\max 8.7V$ $I_o=\max 25mA$ $P_o=\max 150mW$).

Technical specification

General

Display

Type	High intensity reflective numeric and alphanumeric LCD, UV-resistant.
Dimensions	90 x 40mm (3.5" x 1.6").
Digits	Seven 17mm (0.67") and eleven 8mm (0.31") digits. Various symbols and measuring units.
Refresh rate	User definable: fast, 1sec , 3sec, 15sec, 30sec, off.
Option ZB	Transflective LCD with adjustable green LED backlight. Good readings in full sunlight and darkness.
Note ZB	Only available for safe area applications.

Ambient temperature

Safe areas	-40°C to +80°C (-40°F to +176°F).
Intrinsically Safe	-40°C to +70°C (-40°F to +158°F).

Power requirements

Type PB	Long life Lithium battery - life-time depends upon settings and configuration - up to 5 years.
Type PC	Intrinsically Safe long life lithium battery - life-time depends upon settings and configuration - up to 5 years.
Type PD	8 - 24V AC / DC ± 10%. Power consumption max. 10 Watt. Intrinsically Safe: 16 - 30V DC; power consumption max. 0.75 Watt.
Type PF	24V AC / DC ± 10%. Power consumption max. 15 Watt.
Type PM	115 - 230V AC ± 10%. Power consumption max. 15 Watt.
Type PX	8 - 30V DC. Power consumption max. 0.5 Watt.
Type ZB	12 - 24V DC ± 10% or internally powered with type PD / PF / PM. Power consumption max. 1 Watt.
Note PB/PF/PM	Not available Intrinsically Safe.
Note PF/PM	The total consumption of the sensors and outputs may not exceed 400mA @ 24V.
Note	For Intrinsically Safe applications, consult the safety values in the certificate.

Sensor excitation

Type PB/PC/PX	3.2V DC for pulse signals and 1.2V DC for coil pick-up.
Note	This is not a real sensor supply. Only suitable for sensors with a very low power consumption like coils (sine wave) and reed-switches.
Type PD	1.2 / 3.2 / 8.2 / 12 / 24V DC - max. 50mA @ 24V DC.
Type PD-XI	1.2 / 3.2 / 8.2V DC - max. 7mA @ 8.2V DC and mains power supply voltage (as connected to terminal 1).
Type PF / PM	1.2 / 3.2 / 8.2 / 12 / 24V DC - max. 400mA @ 24V DC.

Terminal connections

Type	Removable plug-in terminal strip. Wire max. 1.5mm² and 2.5mm².
------	---

Data protection

Type	EEPROM backup of all settings. Backup of running totals every minute. Data retention at least 10 years.
Password	Configuration settings can be password protected.

Directives & Standards

EMC	Directive 2004/108/EC, FCC 47 CFR part 15.
Low voltage	Directive 2006/95/EC
ATEX / IECEx	Directive 94/9/EC, IEC 60079-0, IEC 60079-11, IEC 60079-26.
IP & NEMA	EN 60529 & NEMA 250

Enclosure

General

Window	Polycarbonate window.
Sealing	Silicone.
Control keys	Three industrial micro-switch keys. UV-resistant silicone keypad.

Aluminum wall / field mount enclosures

General	Die-cast aluminum wall/field mount enclosure IP67 / NEMA 4X with 2-component UV-resistant coating.
Dimensions	130 x 120 x 75mm (5.12" x 4.72" x 2.95") - W x H x D.
Weight	1100 gr.
Type HA	Cable entry: 2 x PG9 and 1 x M20.
Type HL	Cable entry: 2 x 1/2" NPT.
Type HM	Cable entry: 2 x M16 and 1 x M20.
Type HN	Cable entry: 1 x M20.
Type HO	Cable entry: 2 x M20.
Type HP	Cable entry: 6 x M12.
Type HT	Cable entry: 1 x 1/2" NPT.
Type HU	Cable entry: 3 x 1/2" NPT.
Type HV	Cable entry: 4 x M20.
Type HZ	Cable entry: no holes.

GRP wall / field mount enclosures

General	GRP wall/field mount enclosure IP67 / NEMA 4X, UV-resistant and flame retardant.
Dimensions	130 x 120 x 75mm (5.12" x 4.72" x 2.95") - W x H x D.
Weight	600 gr.
Type HD	Cable entry: no holes.
Type HE	Cable entry: 2 x Ø 16mm and 1 x Ø 20mm.
Type HF	Cable entry: 1 x Ø 22mm (7/8").
Type HG	Cable entry: 2 x Ø 20mm.
Type HH	Cable entry: 6 x Ø 12mm.
Type HJ	Cable entry: 3 x Ø 22mm (7/8").
Type HK	Flat bottom, cable entry: no holes.

Panel mount enclosures

Dimensions	130 x 120 x 60mm (5.12" x 4.72" x 2.36") - W x H x D.
Panel cut-out	115 x 98mm (4.53" x 3.86") L x H.
Type HB	Die-cast aluminum panel mount enclosure IP65 / NEMA 4X.
Weight	600 gr.
Type HC	GRP panel mount enclosure IP65 / NEMA 4X, UV-resistant and flame retardant.
Weight	450 gr.

Hazardous area

Intrinsically Safe (Type XI)

ATEX certification	II 1 G Ex ia IIB/IIC T4 Ga. II 1 D Ex ia IIIC T100 °C Da IP6X.
IECEx certification	Ex ia IIC/IIB T4 Ga. Ex ia IIIC T100 °C Da IP6X.
Ambient Ta	-40°C to +70°C (-40°F to +158°F).

Explosion proof (Type XF)

ATEX certification	Ex II 2 GD EEx d IIB T5.
Dimensions	300 x 250 x 200mm (11.8" x 9.9" x 7.9") L x H x D.
Weight	Appr. 15kg.

Signal inputs

Flow meter

Type P	Coil / sine wave (HI: 20mVpp or LO: 80mVpp - sensitivity selectable), NPN/PNP, open collector, reed-switch, Namur, active pulse signals 8 - 12 and 24V DC.
Note	Two flow meter inputs are available for bi-directional measurement or to create a higher resolution by incrementing both pulse trains (sum function). Alternatively, the second input can be used for remote control.
Frequency	Minimum 0Hz - maximum 7kHz for total and flow rate and single pulse. Double pulse max. 3.5kHz without communications and 2.5kHz with communications. Maximum frequency depends on signal type and internal low-pass filter. E.g. reed switch with low-pass filter: max. frequency 120Hz.
K-Factor	0.000010 - 9,999,999 with variable decimal position.
Low-pass filter	Available for all pulse signals.
Option ZF	coil sensitivity 10mVpp.

Additional inputs

Function	Two inputs to start / stop the monitoring function.
Type IR	Internally pulled-up switch contact - NPN.
Duration	Minimum pulse duration 100ms.

Signal outputs

Analog output

Function	Mirrors the flow rate or the measured quantity in relation to the preset value.
Accuracy	10 bit. Error < 0.05%. Analog output signal can be scaled to any desired range.
Update time	Eight times per second.
Type AA	Active 4 - 20mA output (requires PD, PF or PM).
Type AB	Active 0 - 20mA output (requires PD, PF or PM).
Type AF	Passive floating 4 - 20mA output for Intrinsically Safe applications (requires XI + PC or PD).
Type AI	Passive galvanically isolated 4 - 20mA output - also available for battery powered models (requires PB, PD, PF or PM).
Type AP	Passive 4 - 20mA output - not isolated. Unit will be loop powered.
Type AU	Active 0 - 10V DC output (requires PD, PF or PM).

Digital outputs

Function	Two outputs: low and high totalizer alarm.
Type OA	Two active 24V DC transistor outputs (PNP); max. 50mA per output (requires PD, PF or PM).
Type OR	Two electro-mechanical relay outputs (N.O.) - isolated; max. switch power 230V AC - 0.5A per relay (requires PF or PM).
Type OT	Two passive transistor outputs (NPN) - not isolated. Max. 50V DC - 300mA per output.

Communication option

Function	Reading display information, reading / writing all configuration settings.
Protocol	Modbus RTU.
Speed	1200 - 2400 - 4800 - 9600 baud.
Addressing	Maximum 255 addresses.
Type CB	RS232
Type CH	RS485 2-wire
Type CI	RS485 4-wire
Type CT	TTL Intrinsically Safe.

Operational

Operator functions

Displayed functions	<ul style="list-style-type: none"> Preset value - can be entered by the operator. Actual totalized quantity. Percentage: totalized quantity in relation to the preset value. Low total alarm value. High total alarm value. Accumulated total. Flow rate.
---------------------	--

Preset

Digits	7 digits.
Units	L, m³, GAL, USGAL, kg, lb, bbl, no unit.
Decimals	0 - 1 - 2 or 3.

Accumulated total

Digits	11 digits.
Units / decimals	According to selection for total.
Note	Can not be reset to zero; not displayed during process.

Flow rate

Digits	7 digits.
Units	mL, L, m³, Gallons, kg, Ton, lb, bl, cf, RND, ft³, scf, Nm³, NL, gal - no units.
Decimals	0 - 1 - 2 or 3.
Time units	/sec - /min - /hr - /day.
Note	Not displayed during process.

Alarm values

Digits	7 digits.
Units	According to selection for total / preset.
Decimals	According to selection for total / preset.
Time units	According to selection for total / preset.
Type of alarm	low and high totalizer alarm.
Note	The alarm values have to be entered as a percentage of the preset quantity. The unit will calculate and display the absolute value automatically.

Percentage

Digits	4 digits - 000.1 - 999.9 %.
--------	-----------------------------

Accessories

Mounting accessories

ACF02	Stainless steel wall mounting kit.
ACF05	Stainless steel pipe mounting kit (worm gear clamps not included).
ACF06	Two stainless steel worm gear clamps Ø 44 - 56mm.
ACF07	Two stainless steel worm gear clamps Ø 58 - 75mm.
ACF08	Two stainless steel worm gear clamps Ø 77 - 95mm.
ACF09	Two stainless steel worm gear clamps Ø 106 - 138mm.
ACF10	Customized Grevopal tagplates for ACF02 and ACF05, including stainless steel screws. Dimension: 95mm x 12.5mm (3.75" x 0.50").

Ordering information

Standard configuration: F117-P-AP-CX-EX-HC-IR-OT-PX-TX-XX-ZX.

Ordering information:

F117	-	-A-	-C-	-EX	-H-	-IR	-O-	-P-	-TX	-X-	-Z-
------	---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Flow meter input signal

P Pulse input: coil, npn, pnp, namur, reed-switch.

Analog output signal

AA Active 4 - 20mA output - requires PD, PF or PM.
 AB Active 0 - 20mA output - requires PD, PF or PM.
 AF I.S. floating 4 - 20mA output - requires XI + PC or PD.
 AI Isolated 4 - 20mA output - requires PB, PD, PF or PM.
AP Passive 4 - 20mA output, loop powered unit.
 AU Active 0 - 10V DC output - requires PD, PF or PM.

Communication

CB Communication RS232 - Modbus RTU.
 CH Communication RS485 - 2-wire - Modbus RTU.
 CI Communication RS485 - 4-wire - Modbus RTU.
 CT Intrinsically Safe TTL - Modbus RTU.
CX No communication.

Flow equations

EX No flow equations.

Panel mount enclosures - IP65 / NEMA4X

HB Aluminum enclosure.
HC GRP enclosure.

GRP field / wall mount enclosures - IP67 / NEMA4X

HD Cable entry: no holes.
 HE Cable entry: 2 x Ø 16mm & 1 x Ø 20mm.
 HF Cable entry: 1 x Ø 22mm (7/8").
 HG Cable entry: 2 x Ø 20mm.
 HH Cable entry: 6 x Ø 12mm.
 HJ Cable entry: 3 x Ø 22mm (7/8").
 HK Flat bottom, cable entry: no holes.

Aluminum field / wall mount enclosures - IP67 / NEMA4X

HA Cable entry: 2 x PG9 + 1 x M20.
 HL Cable entry: 2 x 1/2" NPT.
 HM Cable entry: 2 x M16 + 1 x M20.
 HN Cable entry: 1 x M20.
 HO Cable entry: 2 x M20.
 HP Cable entry: 6 x M12.
 HT Cable entry: 1 x 1/2" NPT.
 HU Cable entry: 3 x 1/2" NPT.
 HV Cable entry: 4 x M20.
 HZ Cable entry: no holes.

Additional input signal

IR Remote control input to start, stop or slope.

Digital output signals

OA Two active transistor outputs - requires PD, PF or PM.
 OR Two mechanical relay outputs - requires PF or PM.
OT Two passive transistor outputs - standard configuration.

Power requirements

PB Lithium battery powered.
 PC Lithium battery powered - Intrinsically Safe.
 PD 8 - 24V AC/DC + sensor supply - with XI: 16 - 30V DC.
 PF 24V AC/DC + sensor supply.
 PM 115 - 230V AC + sensor supply.
PX Basic power supply 8 - 30V DC (no real sensor supply). Unit requires external loop AP.

Temperature input signal

TX No temperature input signal.

Hazardous area

XI Intrinsically Safe, according ATEX and IECEx.
 XF EExd enclosure - 3 keys.
XX Safe area only.

Other options

ZB Adjustable backlight.
 ZF Coil input 10mVpp.
ZX No options.

The bold marked text contains the standard configuration.

Available Intrinsically Safe.

Specifications are subject to change without notice.



Fluidwell bv
 P.O. Box 6
 5460 AA - Veghel - The Netherlands
 Telephone: +31 (0)413 343 786
 Telefax: +31 (0)413 363 443
 email: displays@fluidwell.com
 Internet: www.fluidwell.com

